


PVP-1802

SPECIAL FEATURES

- * Application in vending machine power supply
- * Stable Output
- * Protection Circuit Built-in
- * Built-in inrush current protection
- * Application products for ROHS
- * Built to meet FCC class B : Customer Ready
- * Safety Approved : Customer Ready

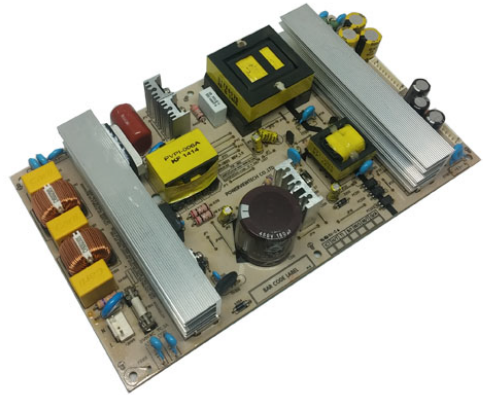

ENVIRONMENTAL

- * Operating temperature range 0 to +45 deg.C.
- * Storage temperature range -20 to +70 deg.C.
- * Circuit is coated for protection against humidity

ELECTRICAL SPECIFICATION

1. Input Requirements

- Input Voltage Range : AC 90V ~ 264V
- Input Frequency Range : 47Hz ~ 63Hz
- Input Current Range : < 2.5A

2. Output Requirements

Output Name	Output Typical(V)	Variable Voltage Range(V)	Voltage Tolerance(%)	Output Current(A)	
				Min	Max
8V	8	7.6VDC ~ 8.4VDC	±5	0.5	3.0
24V	24	22.8VDC ~ 25.2VDC	±5	0.5	6.5

DIMENSION

Size : 225mm X 130mm X 38.6mm

